




Product Size

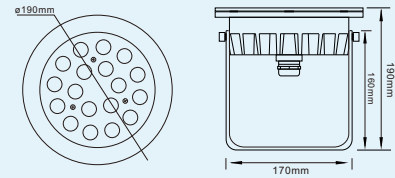

Specification

Model No.:	RS-UW54W316X(88108) / RS-UW72W316X(88108) / RS-UW96W316X(88108)
Front cover & Housing:	Stainless steel 316L
Dimensions:	D190*H250mm(Max.)
Tempered Glass:	8mm thickness
LED chip:	CREE / EDISON
LED Q'ty:	18pcs 3W LED / 18pcs 3in1 LED / 18pcs 4in1 LED / 24pcs 3in1 LED / 24pcs 4in1 LED
Cable gland:	Stainless steel 316L PG13.5
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 20° 30° 45° 60° 90°
Power Cable:	AWG 5/18 or AWG 3/18 SOW rubber cable
Protection Class:	IP68
Environment:	Dry / Submerged
Mounting Hardware:	Surface Mounted System
Net Weight:	4.5kgs with 1.5m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88108.183.01	2700-3000K	18*3	V+/V-	AC/DC24	2250	54	2520
88108.183.02	4000-4500K	18*3	V+/V-	AC/DC24	2250	54	2664
88108.183.03	5000-5500K	18*3	V+/V-	AC/DC24	2250	54	2790
88108.183.04	6000-6500K	18*3	V+/V-	AC/DC24	2250	54	2790
88108.183.05	Red	18*3	V+/V-	AC/DC24	1500	36	630
88108.183.06	Green	18*3	V+/V-	AC/DC24	2250	54	1620
88108.183.07	Blue	18*3	V+/V-	AC/DC24	2250	54	720
88108.183.08	Yellow	18*3	V+/V-	AC/DC24	2250	54	1710
88108.183.09	RGB-DMX512 (3 channel)	18*3	V+ /V- /D+ /D- /GND	DC24	R: 500 B: 750 G: 750	R: 12 B: 18 G: 18	R: 210 B: 240 G: 540
88108.183.10	RGB-DMX512 (3 channel)	18*3in1	V+ /V- /D+ /D- /GND	DC24	R: 750 B: 750 G: 750	R: 18 B: 18 G: 18	R: 450 B: 540 G: 1080
88108.183.11	Auto changing color	18*3	V+/V-	AC24	R: 500 B: 750 G: 750	R: 12 B: 18 G: 18	R: 210 B: 240 G: 540
88108.183.13	RGBV+ (build-in CC driver)	18*3	R/G/B/V+	DC24	R: 500 B: 750 G: 750	R: 12 B: 18 G: 18	R: 210 B: 240 G: 540
88108.243.14	RGB-DMX512 (3 channel)	24*3in1	V+ /V- /D+ /D- /GND	DC24	R: 1000 B: 1000 G: 1000	R: 24 B: 24 G: 24	R: 600 B: 720 G: 1440
88108.244.15	RGBW-DMX512 (4 channel)	24*4in1	V+ /V- /D+ /D- /GND	DC24	R: 1000 B: 1000 W: 1000	R: 24 B: 24 W: 24	R: 600 B: 720 W: 1680
88108.184.16	RGBW-DMX512 (4 channel)	18*4in1	V+ /V- /D+ /D- /GND	DC24	R: 750 B: 750 W: 750	R: 18 B: 18 W: 18	R: 450 B: 540 W: 1620

