




Product Size

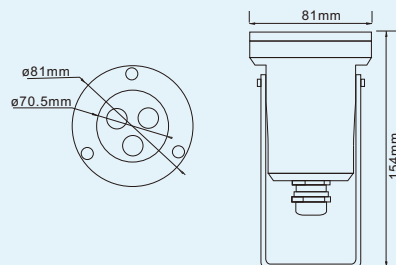

Specification

Model No.:	RS-UW9W316X-A(88131)
Front cover & Housing:	Stainless steel 316L
Dimensions:	D81*H154mm(Max.)
Tempered Glass:	8mm thickness
LED chip:	CREE / EDISON
LED Q'ty:	3pcs 3W LED / 3pcs 3in1 LED / 3pcs 4in1 LED
Cable gland:	Stainless steel 316L PG13.5
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 20° 25° 30° 40° 45° 60° 90°
Power Cable:	AWG 5/18 or AWG 3/18 SOW rubber cable
Protection Class:	IP68
Environment:	Dry / Submerged
Mounting Hardware:	Surface Mounted System
Net Weight:	2.0kgs with 1.5m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88131.033.01	2700-3000K	3*3	V+/V-	AC/DC12-24	750 / 375	9	420
88131.033.02	4000-4500K	3*3	V+/V-	AC/DC12-24	750 / 375	9	445
88131.033.03	5000-5500K	3*3	V+/V-	AC/DC12-24	750 / 375	9	465
88131.033.04	6000-6500K	3*3	V+/V-	AC/DC12-24	750 / 375	9	465
88131.033.05	Red	3*3	V+/V-	AC/DC12-24	500 / 250	6	105
88131.033.06	Green	3*3	V+/V-	AC/DC12-24	750 / 375	9	270
88131.033.07	Blue	3*3	V+/V-	AC/DC12-24	750 / 375	9	120
88131.033.08	Yellow	3*3	V+/V-	AC/DC12-24	750 / 375	9	285
88131.033.09	RGB-DMX512 (3 channel)	3*3	V+ /V-/D+/D-/GND	AC/DC12-24	R: 166 / 83 B: 250 / 125 G: 250 / 125	R: 2 B: 3 G: 3	R: 35 B: 40 G: 90
88131.033.10	RGB-DMX512 (3 channel)	3*3in1	V+ /V-/D+/D-/GND	AC/DC12-24	R: 250 / 125 B: 250 / 125 G: 250 / 125	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180
88131.033.11	Auto changing color	3*3in1	V+/V-	AC12-24	R: 250 / 125 B: 250 / 125 G: 250 / 125	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180
88131.033.13	RGBV+ (build-in CC driver)	3*3in1	R/G/B/V+	DC12-24	R: 250 / 125 B: 250 / 125 G: 250 / 125	R: 3 B: 3 G: 3	R: 75 B: 90 G: 180
88131.034.14	RGBW-DMX512 (4 channel)	3*4in1	V+ /V-/D+/D-/GND	DC24	R: 125 B: 125 G: 125 W: 125	R: 3 B: 3 G: 3 W: 3	R: 75 B: 90 G: 180 W: 270

