

▶ FEATURES

- High efficiency light source, SMD 5050 led.
- High quality SS304 lamp body, Beautiful appearance and reasonable waterproof structure.
- Double Tempered-laminated Glass.
- Supplied with male/female cable.
- Cable gland PG7, nickel-plated brass.
- Long life, up to 45,000 hours.
- Waterproof IP65.
- Beam angle 120°.





▶ OPTIONS ON REQUEST

- Cable lengths can be supplied according to your requirements
- Working voltage DC24V, is available.
- DMX512 (3 channel), Auto change color can be optional.

▶ SPECIFICATION

Body size	D400 x 400 x H90mm
Output Power	22W
Luminous Flux Output	80-90LM/W
Rendering Index	Ra>70
Light source	SMD 5050
IP Grade	IP65
Housing material	Stainless steel 304 + Double Tempered-laminated Glass
Control Mode	Auto color change / DMX512 controllable

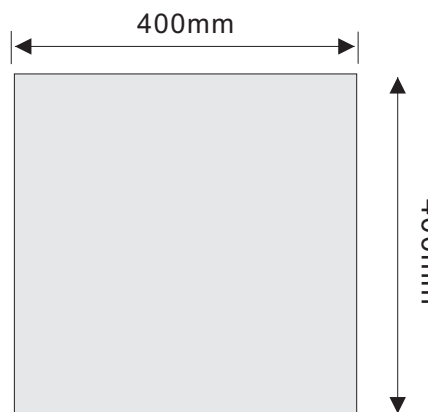

Order information

Item code	LED Q'ty	Color	Control Mode	Line Way	Working Voltage
88502.108.01	108pcs 5050 LED	2700-3000K	/	V+/V- or L/N/G	DC24V
88502.108.02	108pcs 5050 LED	4000-4500K	/	V+/V- or L/N/G	DC24V
88502.108.03	108pcs 5050 LED	5000-5500K	/	V+/V- or L/N/G	DC24V
88502.108.04	108pcs 5050 LED	6000-6500K	/	V+/V- or L/N/G	DC24V
88502.108.05	108pcs 5050 LED	Red	/	V+/V- or L/N/G	DC24V
88502.108.06	108pcs 5050 LED	Green	/	V+/V- or L/N/G	DC24V
88502.108.07	108pcs 5050 LED	Blue	/	V+/V- or L/N/G	DC24V
88502.108.08	108pcs 5050 LED	Yellow	/	V+/V- or L/N/G	DC24V
88502.108.09	108pcs 5050 LED	RGB	DMX512 3 channel	V+/V-/D+/D-	DC24V
88502.108.10	108pcs 5050 LED	RGB	Auto control	V+/V-	DC24V

Please contact us freely if you have any special requirements.

Accessories

**93000023**

T type IP68 quick connector suitable for 6.8-10mm Ø cables max. 3 x 2.5mm² or 5 x 2.5mm²

**93000024**

IP68 quick connector suitable for 6.8-10mm Ø cables max. 3 x 2.5mm²

**93000025**

IP68 quick connector suitable for 8-12mm Ø cables max. 5 x 2.5mm²

**IP23 Switch Power Supply**

Will be choosed according to the light quantity and cable length.

**IP66 Switch Power Supply**

Will be choosed according to the light quantity and cable length.

**88612**

DMX512 CONTROLLER
Model No. : DMX500

**88605**

2.4G wireless DMX/RDM signal converter
Model No.: DSC-24

**88606**


DMX/RDM signal amplifier
Model No.: DSA-01

**88607**

IP68 DMX/RDM signal amplifier
Model No.: DSA-01P

**88604**


12 way DMX/RDM signal amplifier and power splitter
Model No.: DSP-12

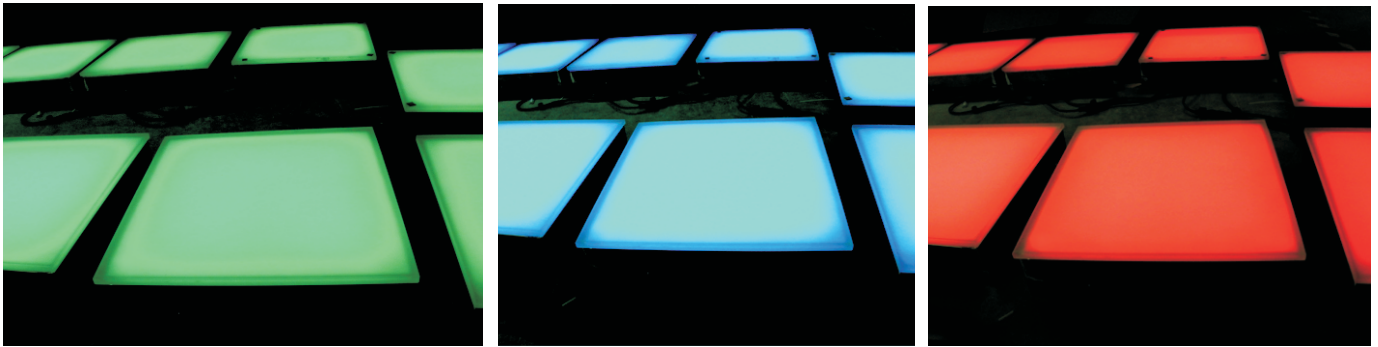


22W LED Brick Light

Item Code: 88502
Model No.: RS-BR4040


Wiring Diagram (1)

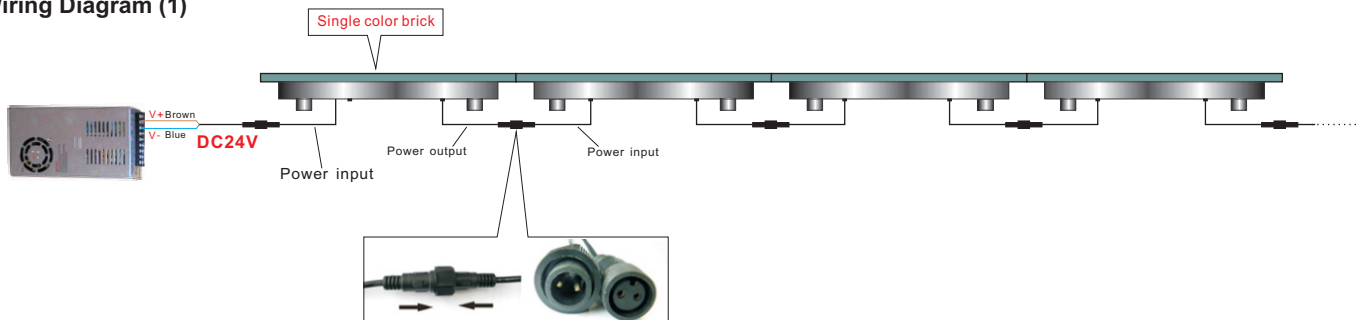

Wiring Diagram (2)

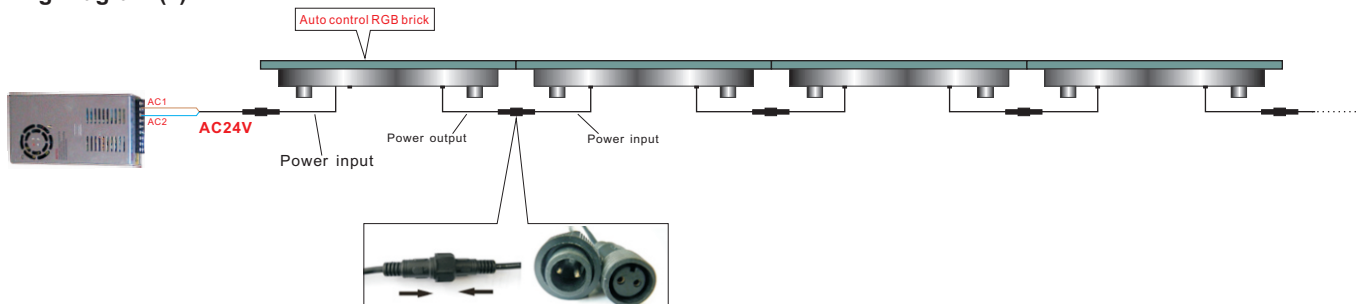

Wiring Diagram (3)

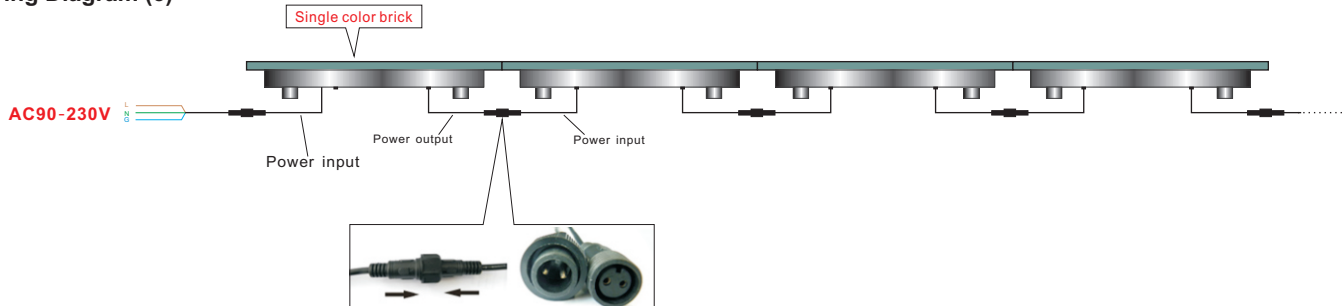

Wiring Diagram (4)

